

New Product Bulletin – Ultra Airtight Insulated Ceiling Boxes*

April, 2011


We are pleased to offer our new line of ultra airtight insulated ceiling (IC) boxes in a variety of sizes, **designed for an airflow rate not exceeding 2 CFM***, meeting the most stringent regulations.

- Fully caulked corners.
- Gasketed mating plaster frame surfaces.
- Gasketed mating surfaces of integral junction box.
- Double ceiling box with 7/16" airspace.
- Galvanized steel construction.
- Holes or other features can be added to suit special requirements.
- Plaster frames available with any hole size or other required features.



Plaster frames sold separately for ease of electrical components assembly, as are interior & exterior junction box covers.

For the standard IC boxes, our bar hangers slide into integral slots in the plaster frame. For the large IC boxes, these slide into our bar hanger brackets, which snap fit onto the large plaster frames.

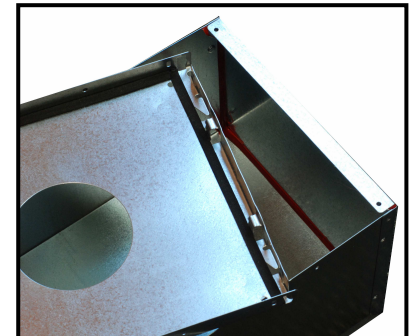


BOX ITEM #	DESCRIPTION	BOX (Dims. in inches)			FITS W/ PLASTER FRAME SERIES
		LENGTH	WIDTH	HEIGHT	
1281-11AT	STANDARD	11-3/4	8-1/2	6-3/4	1286-XAT
1285-11AT	STANDARD-SHORT	11-3/4	8-1/2	4-3/4	1286-XAT
1284-11AT	LARGE-SHORT	14-7/8	12	6-3/4	1283-XAT
1282-11AT	LARGE-TALL	14-7/8	12	8-1/2	1283-XAT
1282-21AT	LARGE-EXTRA TALL	14-7/8	12	11-1/4	1283-XAT

ANCILLARY PARTS

ITEM #	DESCRIPTION
1242-31	INTERNAL JUNCTION BOX COVER (W/SPRING)
1242-30	EXTERNAL JUNCTION BOX COVER
1280	BAR HANGER BRACKET: 2 REQ'D (FOR 1283 SERIES PLASTER FRAMES ONLY)
1287	BAR HANGER, SET MALE & FEMALE, – 2 REQUIRED
SEE TABLE ABOVE	PLASTER FRAME

Downlight Line
Represented
in USA by:



800-621-1348

All parts are made in dedicated tooling for the most competitive pricing. Contact our sales department at 1-800-361-0983 or sales@TripairInc.com.